

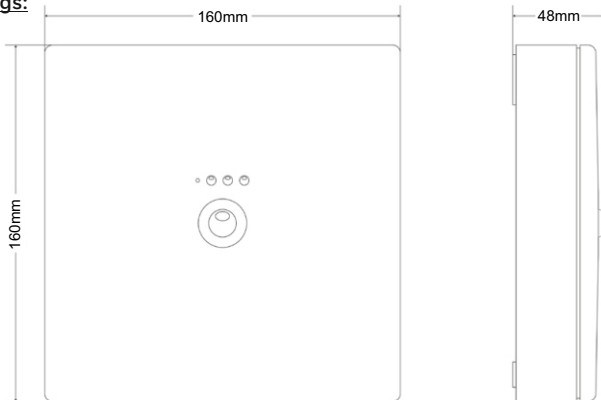



### Addressable CBS Emergency Light

#### Dimensional Drawings:



#### Installation:



**Step 1:** Mount the socket.

**Step 2:** Connect the mains cables L, N and GND (optional) to the terminal block. Power supply cables cross section should be 0.8 – 3 mm<sup>2</sup>.

**Step 3:** Set the module address. For more information about module settings see the next page.

**Step 4:** Hook the luminaire to the two notches in the socket and push carefully until the plastic hook locks.

**Disassembly:** Press the plastic hook (picture 4) using e.g. a screwdriver and carefully pull the luminaire down.

Technical description	AeriLED AP High Ceiling SET-10 230V
Part no.:	290073.S10
Operation Voltage:	100-240V AC/DC, 50-60 Hz
Maximum Power Consumption:	4.6W / 4.9VA
Lumen output:	360 lm
Produced in accordance with:	EN 60598-1, EN 60598-2-22, EN 55015 EN 61547, EN 61000-3-2, EN 61000-3-3
Ambient Temperature Range:	-10 to 60 °C
Relative Humidity:	Up to 95%
Degree of cover protection:	IP20
Technical lifetime (light source):	> 100000 hours
Weight:	450 gr



The light source contained in this luminary shall only be replaced by the manufacturer, or his agent, or a similar qualified person.

**NOTE!** The light source is non-user replaceable.




At the end of their useful life the packaging and product should be disposed of via a suitable recycling centre.  
Do not dispose of with your normal household waste.  
Do not burn.



# SET010 select

## MODULE FOR SINGLE LAMP SELECTION AND MONITORING

Switching of one selected light in the electric circuit

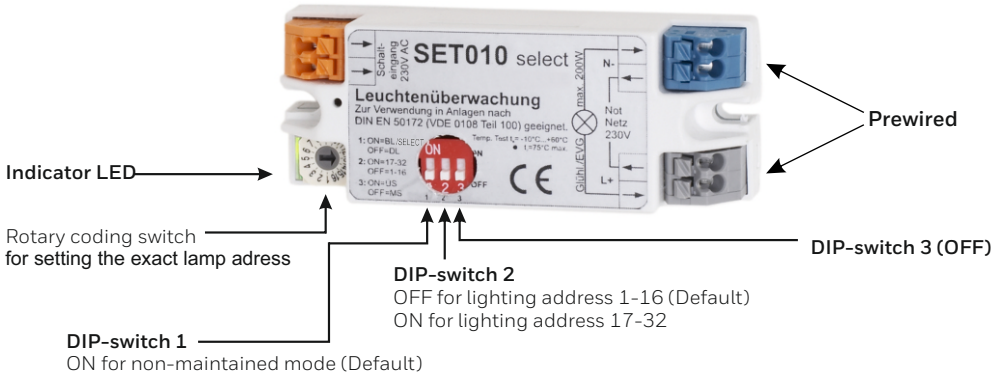

**Attention!**  
**Connect L and N correctly!**  
**Exchanging L and N causes malfunction.**

## Function

By means of a suitable control, it is possible with the aid of the SET010 select to determine whether the lamp connected to it is ready for use or faulty.

## Settings

Setting the lighting address is carried out by a rotary coding switch that is easily accessible from the outside.

Lighting addresses 1 to 16 can be selected when DIP switch 2 is set at OFF.

The module is already prepared for administering a total of 32 lighting addresses.

The address range 17 to 32 can be selected by setting DIP switch 2 to ON.

(DIP switch 2 = ON and rotary coding switch = 1 is equivalent to lighting address 17 etc.)

Technical description	SET010 select
Dimensions (L x W x H in mm)	78 x 30 x 20
Temperature:	-10°C up to +60°C, $T_{cmax} = +75°C$
Cross section:	Max: 1.5mm <sup>2</sup>