


Bus signalling panel MFT 5

For use in systems according to DIN 5035/4844 and DIN EN 50172 (VDE 0108-100)

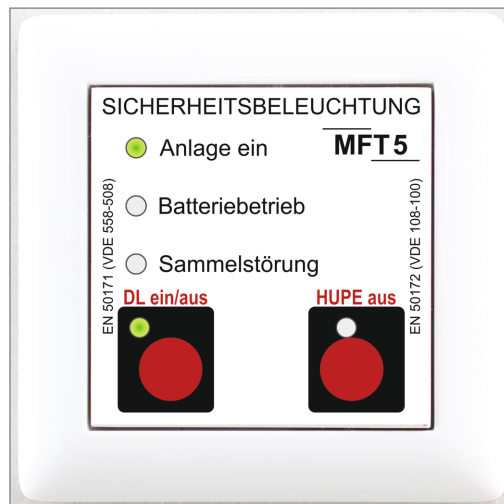

MFT 5

Translation

Sicherheitsbeleuchtung:	Safety lighting
Anlage ein:	System on
Batteriebetrieb:	Battery operated
Sammelstörung:	Collective fault
DL ein/aus	DL on/off
HUPE aus	HORN off

Funktionalität Signalling and remote control panel according to DIN EN 50172 (VDE 0108 part 100) for external signalling of the operating states of the system with the following displays and functions

- System ON
- Battery operated (optical and acoustic signal)
- Collective fault message
- Switch continuous light ON/OFF (2 sec.)
- Switch off horn to acknowledge an acoustic signal

In case of wire breakage or bus fault, the DL-lamps are switched on automatically. In addition, all LEDs flash every second and the horn sounds. The acoustic signal can be acknowledged via the "HORN OFF" button.

Technical Data

Messages:	5 LEDs, acoustic signal (horn)
Supply voltage:	24 VDC +/- 15%
Connection:	LAN CAT 7
Bus connection:	RS485
Dimensions (H x W):	80 x 80 mm
Temperature (t _a):	0 °C to + 40 °C
Protection type / class:	IP 20 / II

The MFT 5 annunciator panel is available in flush-mounted and surface-mounted versions (including housing).