

HONEYWELL DALI PLUG-IN




290091.3

Plug-in modul DALI

- Enheten plugges enkelt og raskt inn i alle LIFE-X / LIFE-X 10Y armaturene
- Alle LIFE-X/ LIFE-X 10Y armaturene har software for DALI plug-in modul
- IP20
- Omgivelsestemperatur er -25 til +50 °C
- Honeywell DALI Plug-in fungerer med DALI controller / gateway, som er iht. IEC 62386-102 og 202
- DALI og DALI-2 (DALI-2 er bakoverkompatibel)

Kompatibel med alle LIFE-X armaturer

SYSTEMSKISSE

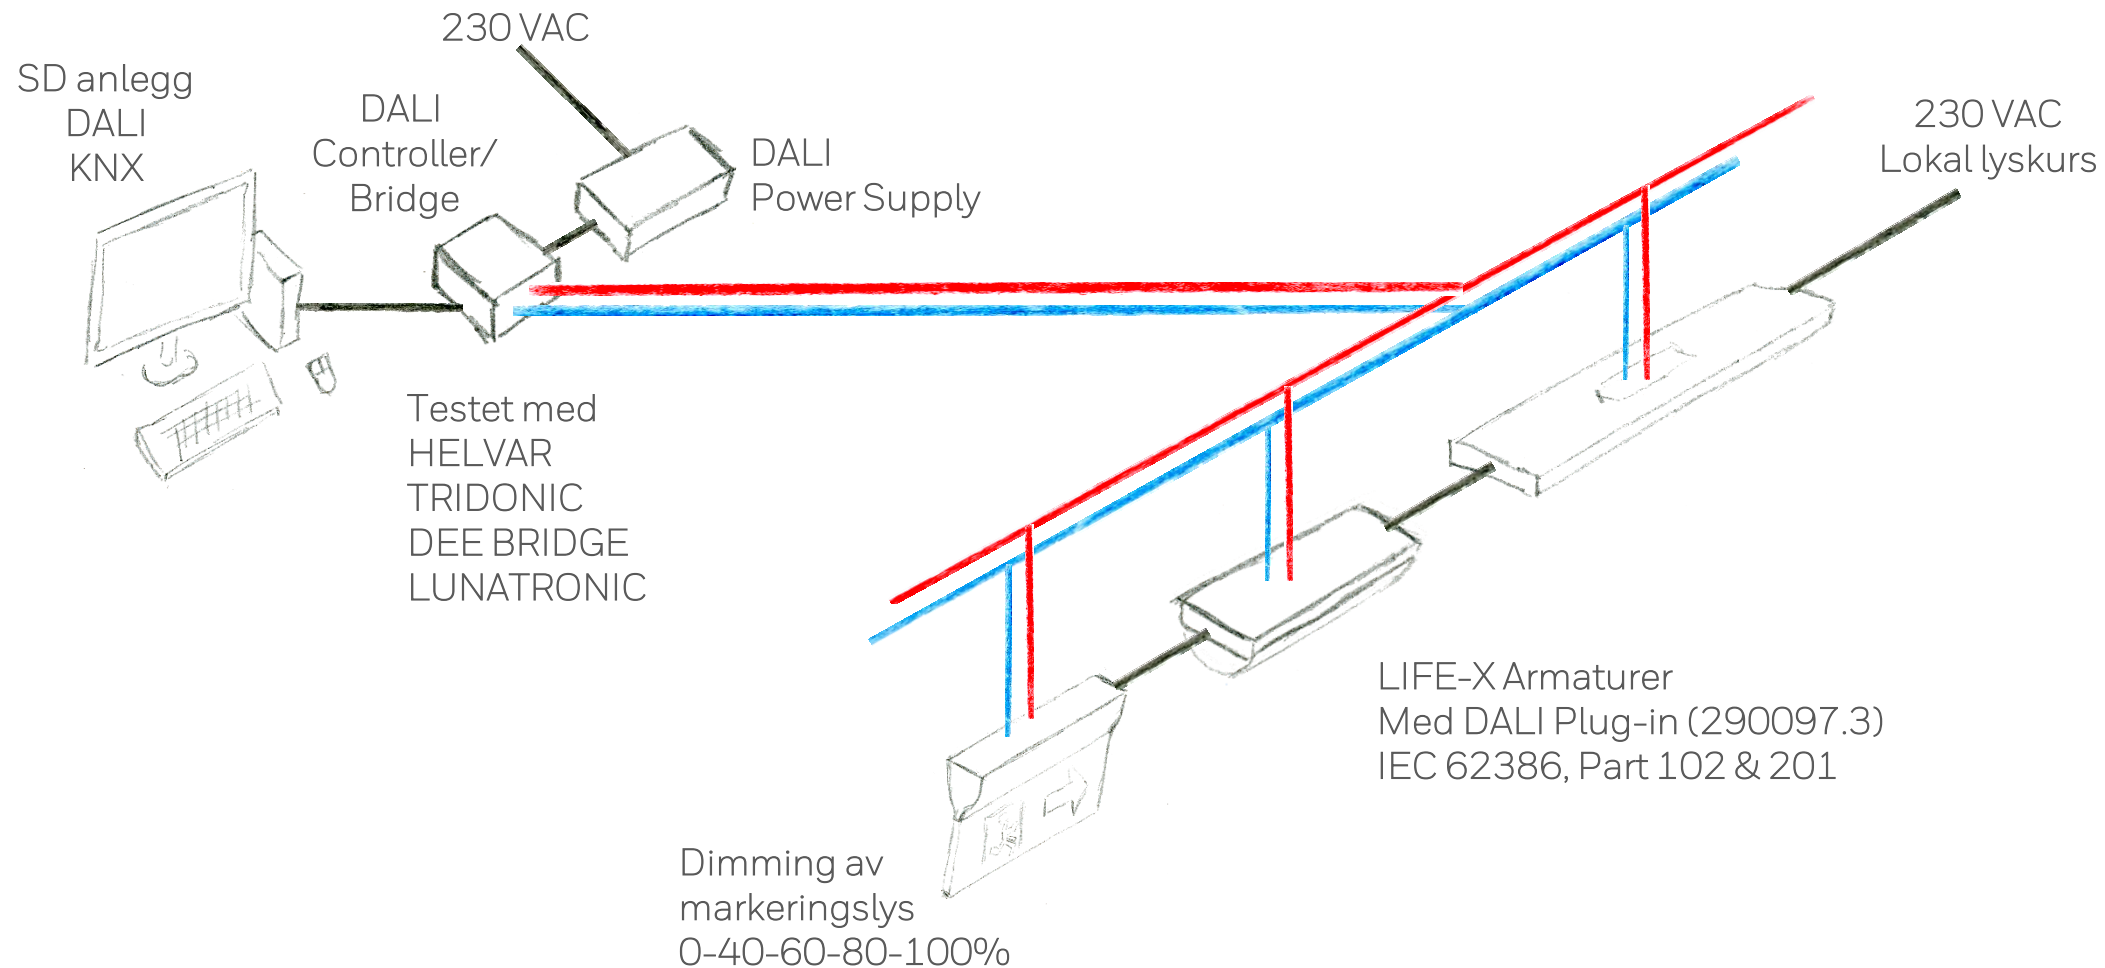

DALI - IEC 62386 Part 102 & 202*

* Se liste neste slide

SUPPORTERTE DALI KOMMANDOER

Alle kommandoer for short addressing og commissioning:

INITIALISE
RANDOMISE
COMPARE
WITHDRAW
SEARCHADDRH
SEARCHADDRM
SEARCHADDRL
PROGRAM SHORT ADDRESS,
VERIFY SHORT ADDRESS
QUERY SHORT ADDRESS
ENABLE DEVICE TYPE
PING

IEC 62386-102 Kommandoer

OFF
RECALL MIN LEVEL
RECALL MAX LEVEL
STEP UP
STEP DOWN
ON AND STEP UP
STEP DOWN AND OFF
RESET
SET MIN LEVEL (DTR0)
SET MAX LEVEL (DTR0)
DAPC (level)
GO TO SCENE (sceneNumber)
UP
DOWN
QUERY EXTENDED VERSION NUMBER
SET POWER ON LEVEL (DTR0)
QUERY POWER ON LEVEL
SET SYSTEM FAILURE LEVEL (DTR0)
QUERY SYSTEM FAILURE LEVEL

*Dimming er satt til 0-40-60-80-100 %

IEC 62386-202 Kommandoer

STORE ACTUAL LEVEL IN THE DTR
STORE THE DTR AS MAX LEVEL
STORE THE DTR AS MIN LEVEL
STORE THE DTR AS SYSTEM FAILURE LEVEL
STORE THE DTR AS POWER ON LEVEL
STORE THE DTR AS SCENE
REMOVE FROM SCENE
QUERY LAMP FAILURE
QUERY LAMP POWER ON
QUERY LIMIT ERROR
QUERY DEVICE TYPE
START FUNCTION TEST
START DURATION TEST
STOP TEST
RESET FUNCTION TEST DONE FLAG
RESET DURATION TEST DONE FLAG
RESET LAMP TIME

IEC 62386-102 Kommandoer forts

STORE TEST DELAY TIME HIGH BYTE
STORE TEST DELAY TIME LOW BYTE
STORE FUNCTION TEST INTERVAL
STORE DURATION TEST INTERVAL
STORE TEST EXECUTION TIMEOUT
START IDENTIFICATION
QUERY BATTERY CHARGE
QUERY TEST TIMING
QUERY DURATION TEST RESULT
QUERY LAMP EMERGENCY TIME
QUERY LAMP TOTAL OPERATION TIME
QUERY EMERGENCY LEVEL
QUERY EMERGENCY MIN LEVEL
QUERY EMERGENCY MAX LEVEL
QUERY RATED DURATION (60min)
QUERY EMERGENCY MODE
QUERY FEATURES
QUERY FAILURE STATUS
QUERY EMERGENCY STATUS
QUERY EXTENDED VERSION NUMBER
ENABLE DEVICE TYPE 1