


Relay module OUTPUT 6 / CL

Module for up to 6 potential-free programmable signalling contacts

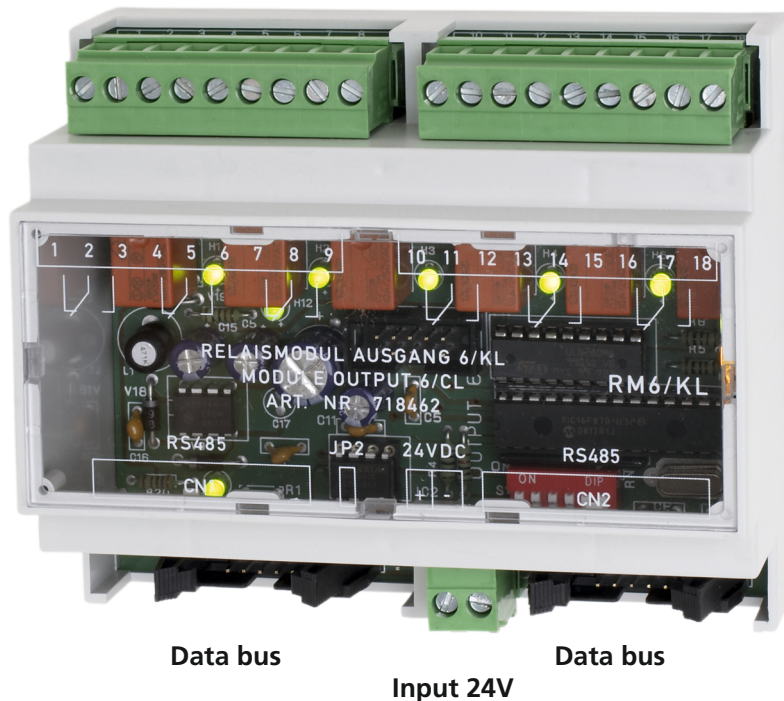

Relay with status LED

3 green LEDs indicate the status of the data bus

Data bus

Input 24V

Data bus

Functionality Every signal can be issued via the system on these two-way switches.

Status tracking via LED The status of each individual relay as well as the status of the data bus is indicated via LEDs. One LED per relay indicates whether the relay is actuated (LED alight) or released (LED is not alight).

Installation The output module can be fitted internally as well as externally. **Only one bus cable (LAN CAT 7)** is required.

Technical data

Supply voltage: 24VDC +/- 15%
Maximum contact load: 5.0A / 230V AC
0.5A / 230V DC
2.0A / 24V DC

Dimensions (WxHxD in mm): 105x90x58

Versions Relay module OUTPUT 8/KL with 8 floating freely programmable signalling contacts
[Dimensions (wxhxd in mm): 159x90x58]