


Outgoing circuit module ABG 4 select

Module for up to 4 freely programmable end circuits with the possibility of to switch **each lamp individually** within the circuit

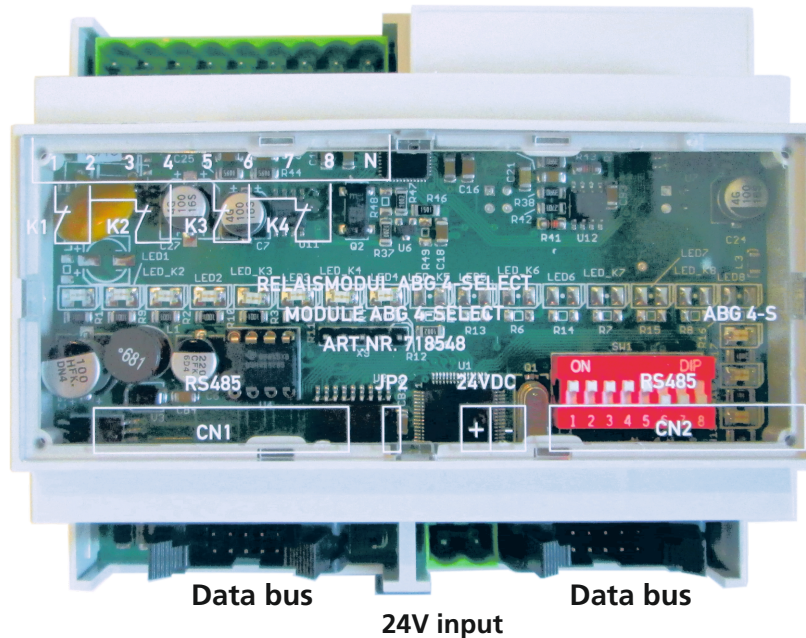

Relay with status LEDs

3 yellow LEDs inform about the status of the data bus

Functionality Each individual luminaire in the circuit can be switched individually via digital inputs (BUSINESS-select technology). Plus: Simultaneous calibration of all connected circuits.

Status displays Both the status of the data bus and the status of each individual outgoing circuit is indicated by LEDs.

LED lights up green. The outgoing circuit is switched on.

LED flashes red. There is no current.

The LED lights up red. The circuit monitoring test is negative, i.e. there is a circuit or lamp fault.

Installation The outgoing module can be installed both in the central unit and in the sub-distribution boards of the emergency lighting. Only one bus line (LAN CAT 7) is required at a time.

Technical data

Exits:	maximale Anschlussleistung pro ABG 4 select 3000 VA
Supply voltage:	24 VDC
Maximum power loss per module:	5 W
Maximum switching current per circle:	6 A
Maximum total power per module:	13,5 A
Dimensions (BxHxT):	105 x 90 x 58mm